

Integrated Energy Systems


Cathy Riddle	Synthesis of Nanocomposite Polymer Material for Thermal Storage
Gorakh Pawar	A fundamental investigation of the current leakage mechanism and relevant harsh environmental chemistries in solid oxide materials
John Klaehn	Modular Designs for Facilitated Transport Membranes in Olefin Production
Meng Shi	Sulfate Double Salts: Using Recycled Ni and Co Sources to Produce Cathodes in Lithium-ion Batteries
Qiang Wang	Recovery of High Purity Critical Elements from Spent Lithium Ion Batteries without Waste Emission
Rebecca Fushimi	Methane Upgrading Using Dynamic Energy Supply
Rebecca Fushimi	Continuous Syngas Production from a New Chemical Looping Concept to Balance Power Dynamics in Integrated Energy System
Victor Walker	Deep Reinforcement Learning and Decision Analytics for Integrated Energy Systems

Smart Rocks and Thermogenic Cement Material for Thermal Energy Storage

Catherine Riddle and Joshua McNally

Smart Rocks & Thermogenic Cement (TGC)

- Thermogenic Cement (TGC) and Smart Rocks have been designed to address needs for technologies in energy demand and thermal controls.
- TGC and Smart Rocks can store heat for electricity, residential heating, engine security, and energy loss protection.
- TGC and Smart Rocks outperform industry standards, such as basalt and basalt glass, by more than 60%.
- TGC and Smart Rocks are environmentally friendly, non-hazardous, stable (no thermal runaway as seen in Li-ion batteries), and no fire or explosive hazard.



Basalt rock test material



From left – right, Thermogenic Cement spheres, before heating (silver), after heating (dark grey), and the core material without metal casing.

Large Commercial Operation

- TGC is useful for large sensible heat storage, a process where energy is stored as heat within a physical body.
- TGC consists of a cement core, an inner coating, and a steel alloy shell.
 - The Cement functions as the main heat storage medium, water within the structure enhances specific heat and the inner coating prevents water from escaping the internal system.
- Smart Rocks material can be used for smaller more compact applications as a PCM.
 - Incorporation of inorganic nanoparticles into the Smart Rock core matrix significantly and positively affects the properties of the matrix resulting in improved thermal, mechanical, rheological, electrical, catalytic, fire retardant and non-hazardous properties.

Current thermal storage technology



Siemens Gamesa volcanic rock TES



TGC could reduce the footprint of thermal energy storage from the size of a silo to that of a Ford F-150 truck.



Thermogenic Cement prototype design.

Development & Testing



Carbon steel sphere with cement core along side.

- Steel spheres were used as a basis into which a plaster coating and cement or paraffin core were applied.
- Thermal Gravimetric Analysis was used to determine mass loss from heating, and specific heat.



TGC and Smart Rock sphere after heating cycle


- Furnaces were used to heat TGC and Smart Rocks to operational temperature of 800 and 100°C, respectively. Rate of cooling was measured to extrapolate thermal performance.



Smart Rocks phase change material (PCM)

Results

- TGC: Refractory cement saturated with water has a large specific heat capacity. Increasing water content decreases the rate at which heat energy can be released but increases the amount of heat energy present. The presence of plaster assists cement in retaining water concentration.
- SR: Addition of Ti nanoparticles increases thermal retention and extends thermal load time.

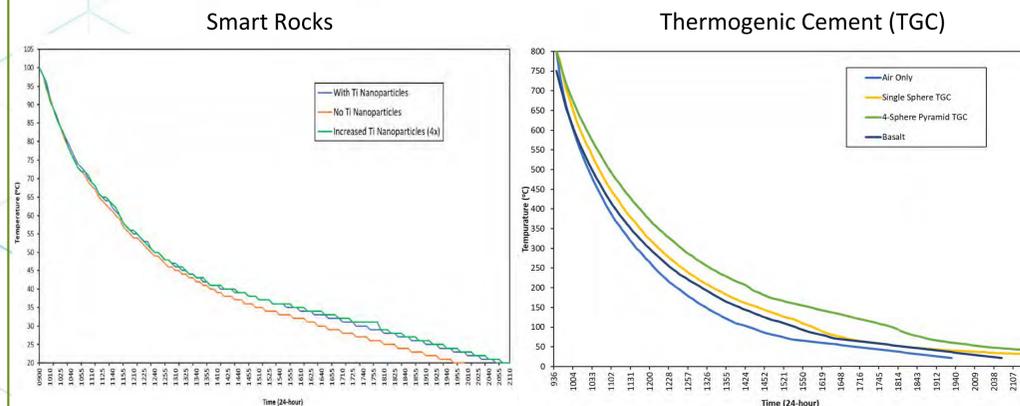

Conclusion

- Thermogenic Cement and Smart Rocks show promise as novel systems with benefits from replaceable parts allowing for versatility in function.
- The binding of water in the TGC cement allows for a much greater Specific Heat capacity. Smart Rocks Ti nanoparticles increase PCM stability and thermal retention.
- The steel alloy shells provide a structurally consistent design which makes engineering the material simple, fast, and inexpensive to mass produce.
- Patent pending on both technologies and current interest in licensing by energy industry and technology startup company partners for TGC.

Thermal Energy Storage material	Energy Density J/(kg · °C)
TGC	3.0E ⁶
Smart Rocks	2.9E ⁶
Basalt	1.8E ⁶


Special thanks to interns Evelyn Andrade and Tyler Reed for their hard work advancing this work.

Project Number: 21A1050-002FP





LRS Number: INL/JOU-22-69661

Motivation

- **What:** Low faradaic efficiency of SOECs affects the costs per kilogram of H₂ and the large-scale adoption of H₂ as a fuel.
- **Why:** Addressing the fundamental issues surrounding the low faradaic efficiency can pave the way for a better SOEC design.

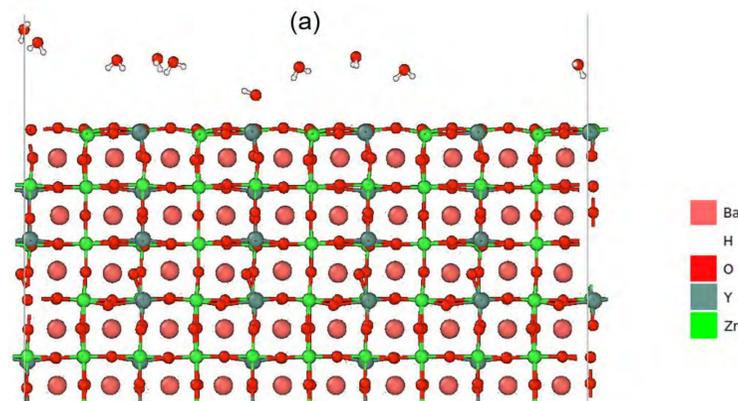



Results

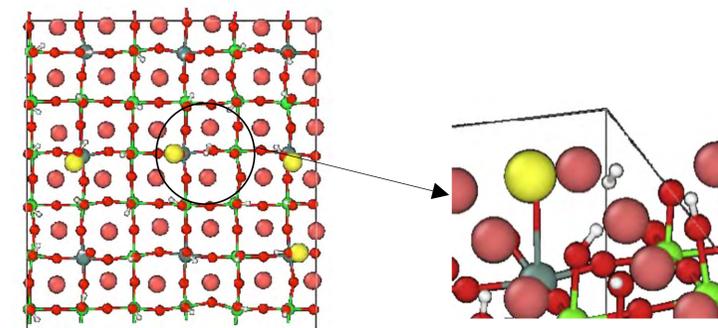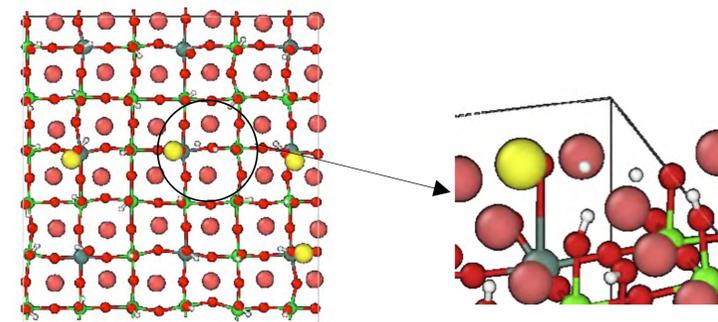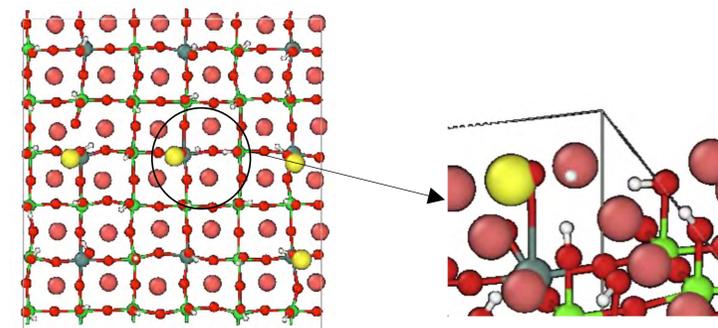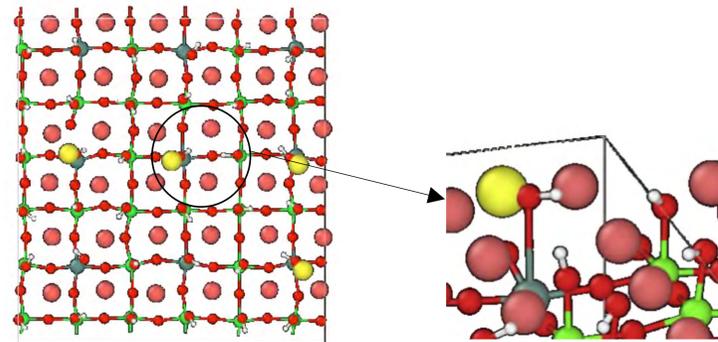

Evolution of complex H₂ generation reaction

Methodology

R&D workflow to unlock the intrinsic SOEC chemistries

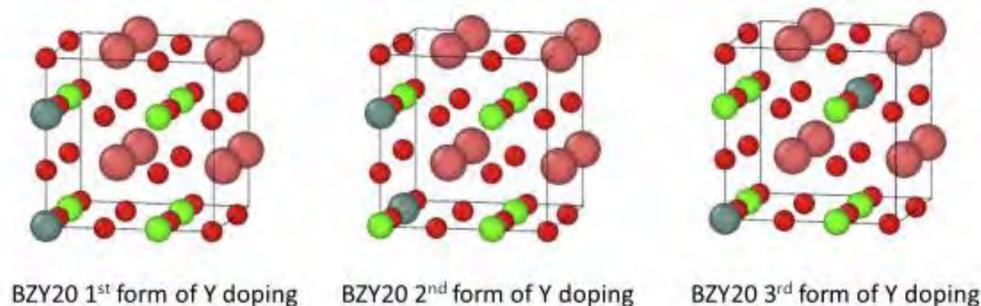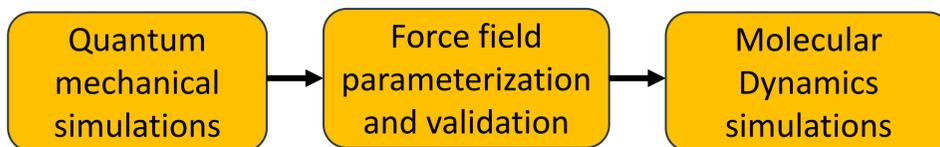

Energy (kcal/mol):
eReaxFF 5.09
DFT 5.30

Energy (kcal/mol):
eReaxFF 1.59
DFT 1.38

Energy (kcal/mol):
eReaxFF 0
DFT 0



Major takeaways

- A deep-dive into the fundamentals of SOEC operation under realistic provided various **intriguing insights**.
- **Oxygen vacancy concentrations and distribution** hold a key in electron migration and efficient hydrogen production.
- **Doping** could be an effective strategy to modify the SOEC surface properties and the electron mobility.
- eReaxFF force-field-based approach sets the stage to simulate electron conductivity, **electron leakage and other non-zero-voltage effects** in SOECs.

Research output and impact

- **Scientific advances:** Four manuscripts and one conference paper. Journal includes NPJ Computational Materials (Nature)
- **STEM pipeline development:** 4 early career staff members, 1 postdoc, 2 graduate interns who competed for INL's distinguished postdoc positions, lab techs, and other support staff
- **Research collaborations:** 1 Distinguished professor, 1 associate research professor, 3 graduate students, Frontiers of Energy Science seminar for INL researchers
- **External grant applications competed:** EFRC, EERC, BES, CMI

Robust and Scalable Membranes for Effective Ethylene Recovery from Point Source Generators

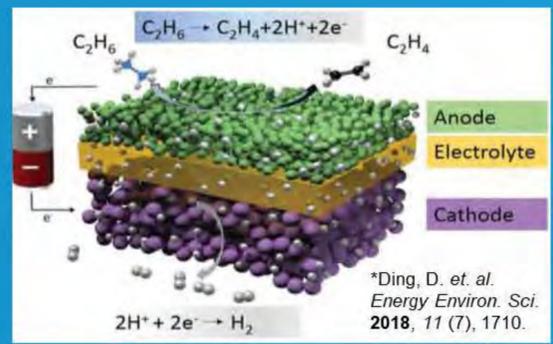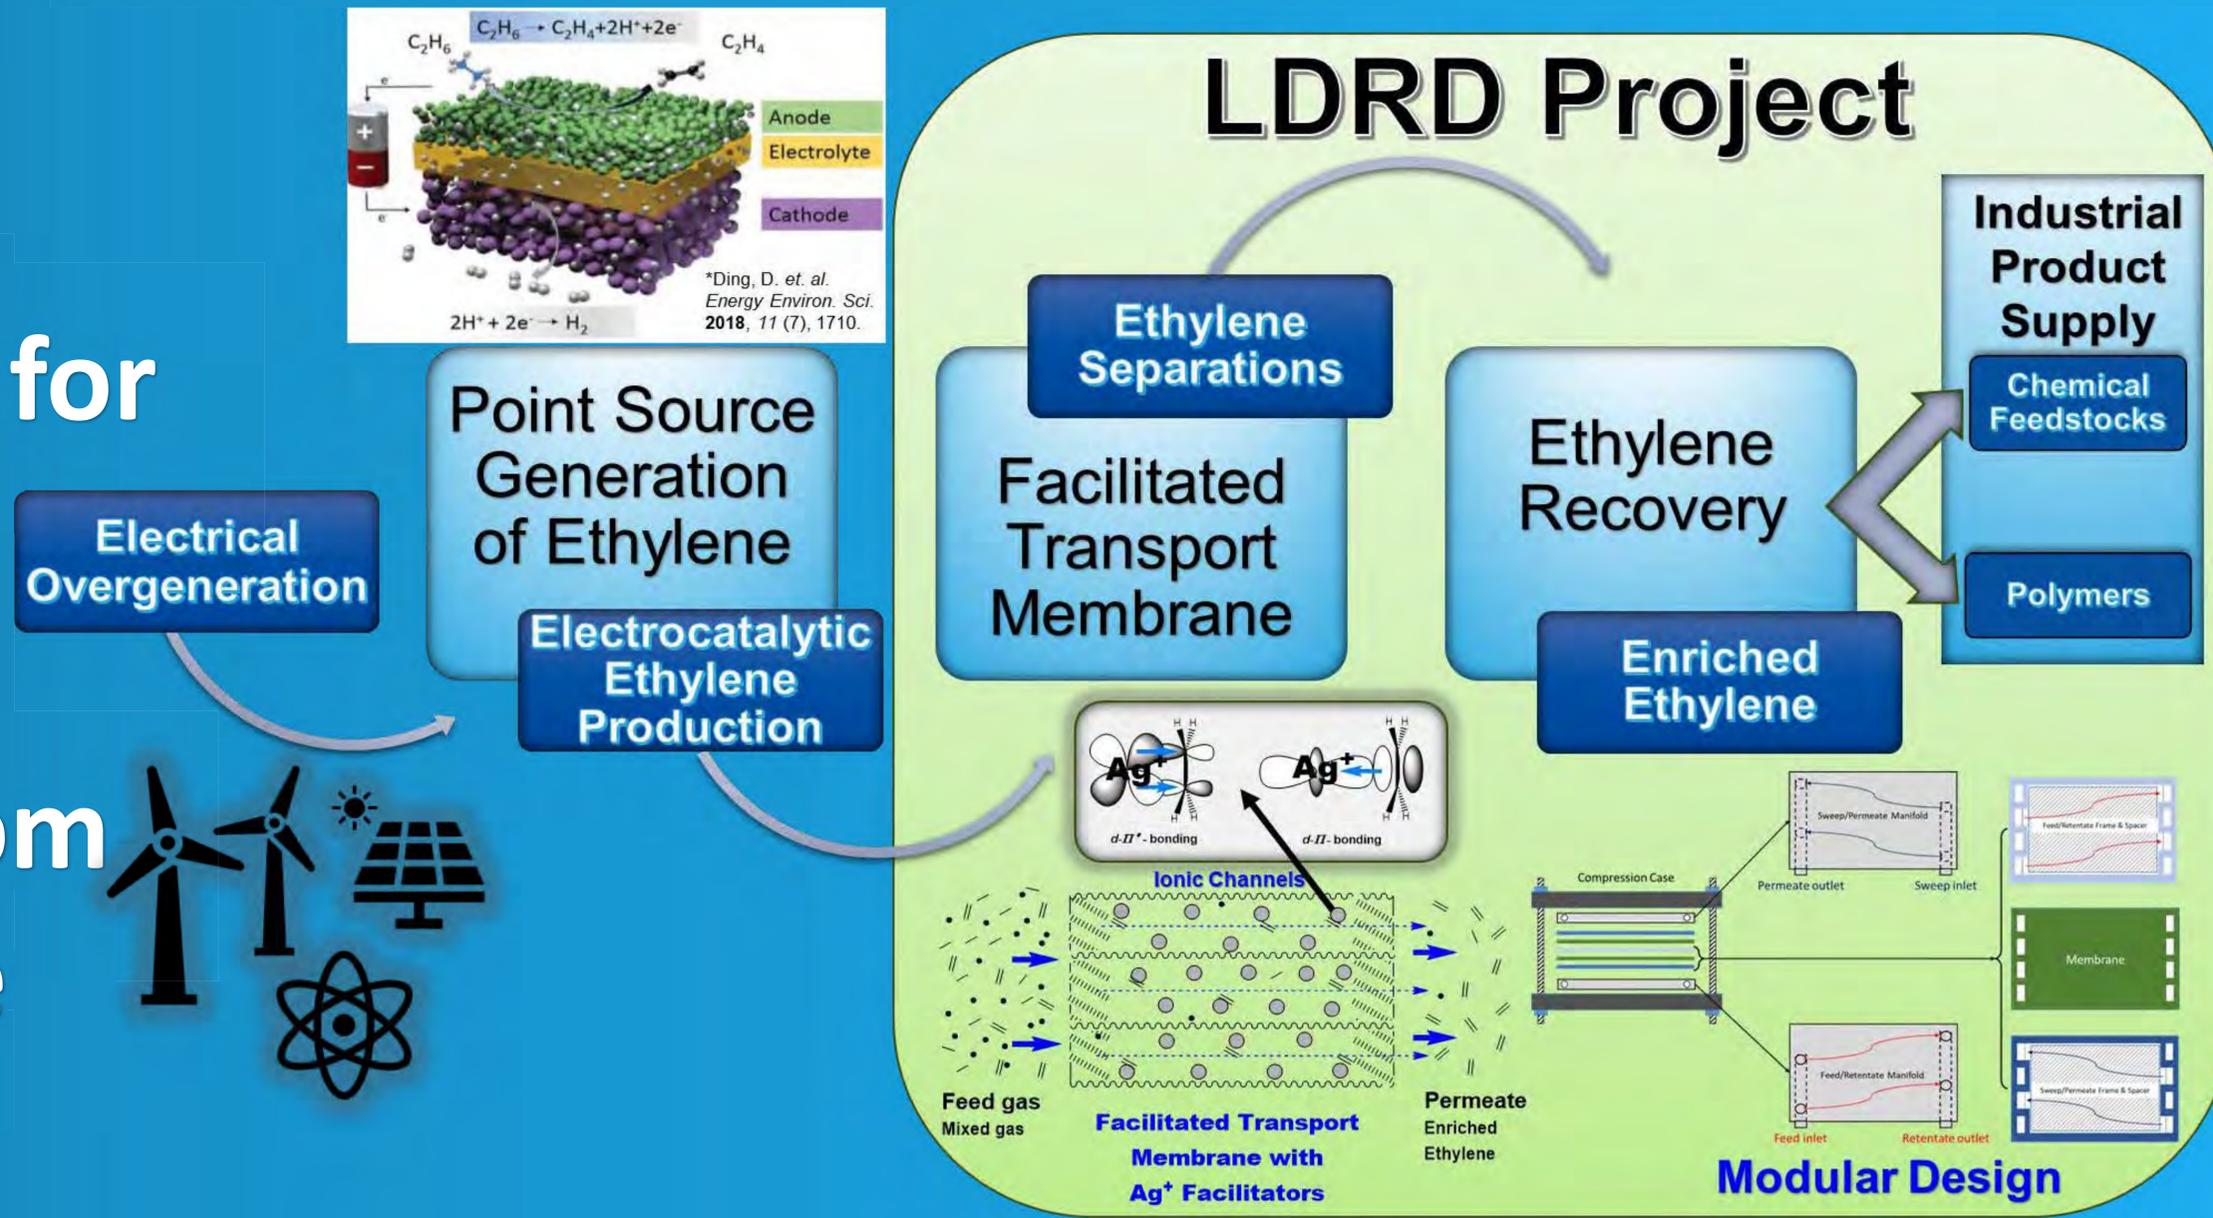

Title: Modular Designs for Facilitated Transport Membranes in Olefin Production

John R. Klaehn^{1,*}, Christopher J. Orme¹, Luis A. Diaz-Aldana¹, G. Glenn Lipscomb²

¹Idaho National Laboratory (INL); ²University of Toledo (UToledo)

Needs: New applications for electricity during periods of overgeneration.


Application: Point-source generation and purification of ethylene (electrocatalytic processes).

Challenge: Ethylene production is not selective. Thus, a downstream separation process is required to obtain a purified product. Current industrial processes, such as cryogenic separations, require long ramp-up time and energy to achieve temperatures for ethylene separations. This prevents their use with intermittent energy source (or for associated load leveling applications).

Solution: Separations with minimal operation delay time to collect ethylene.

METHODS

Facilitate Transport Membrane (FTM) assembly and module fabrication were analyzed with mixed-gas permeability using GC.

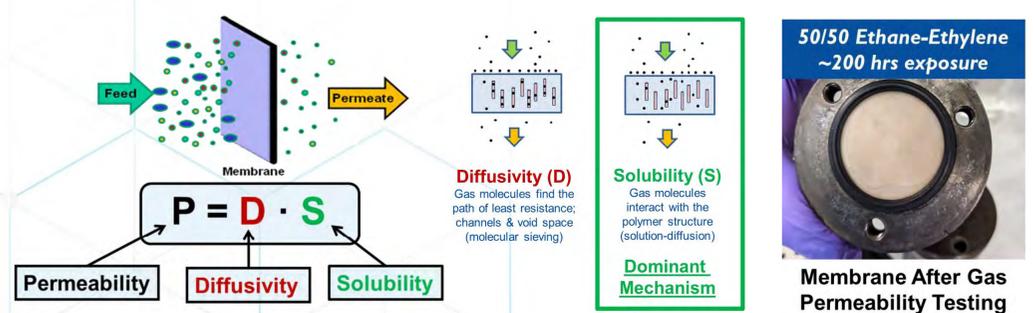

RESULTS

- Silver(I) salts were added with PDMS to form the FTM for ethylene (C_2H_4).
- Is easily fabricated and potentially scaled.
- Gas permeability with the PDMS FTM can switch among gas mixes and still maintain C_2H_4 production with CO_2 , CO , CH_4 , N_2 , C_2H_6 and H_2 .
- C_2H_4 separation ratio is up to 150 for C_2H_4 over C_2H_6 , and C_2H_4 permeation up to 200 GPU for 50 vol%, 10 vol% and 2 vol% ethylene gas mixtures.
- Water vapor does not affect C_2H_4 transport.
- Ag FTM remains active for ethylene **after 30 days**, while exposed to various gas mixtures.
- Larger scale module designs were made by UToledo and tested. (INL IDR – BA-1307)


Sulfate Double Salts: Using Recycled Nickel and Cobalt Sources to Produce Cathodes in Lithium-ion Batteries



PRESENTER:
Meng Shi



- Bor-Rong Chen, Pete L. Barnes, Luis A. Diaz Aldana, John R. Klaehn, Tedd E. Lister
- Idaho National Laboratory (INL)

This project bridges a technology gap by synthesizing new cathodes with isolated metals from recycled lithium-ion batteries.

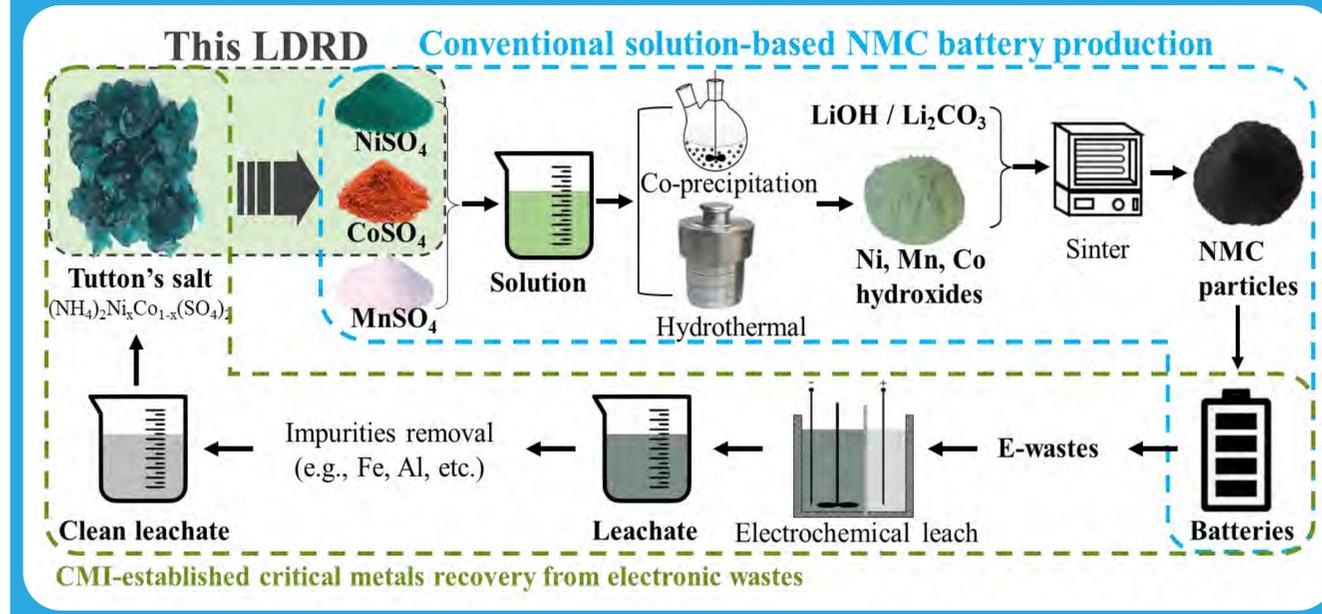


RESULTS:

- Proof of concept:** A new NMC battery cathode can be made from recycled Tutton's salts, which diversifies the supply chain of critical materials and closes the loop of lithium-ion battery recycling process
- Similar battery performances for conventional and non-conventional transition metal sources

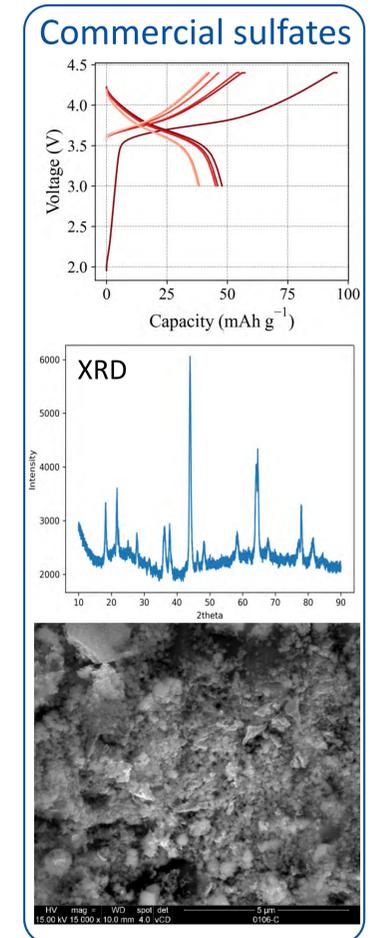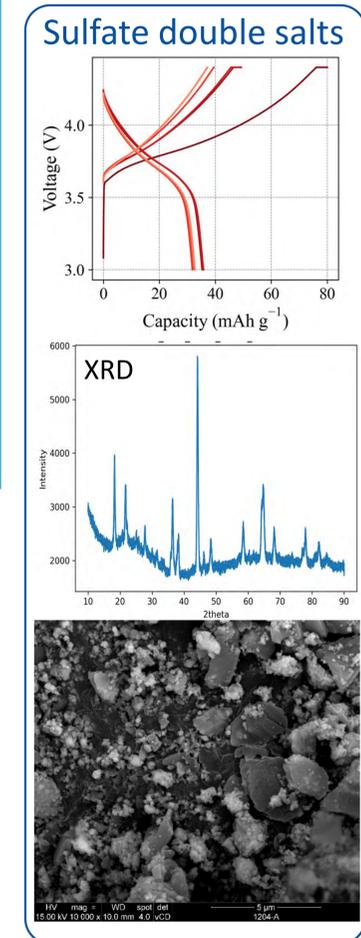

METHODS:

Use commercial Tutton's salt as the surrogate

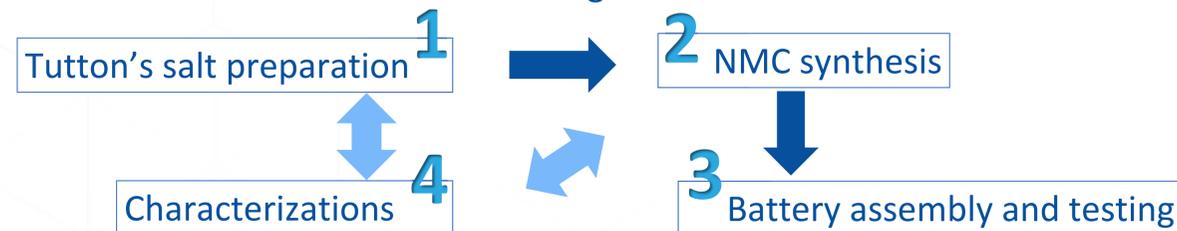


IMPACTS:

- Develop new manufacturing methodology for NMC cathodes
- Provide a pathway to digest spent Li-ion batteries
- Simplify battery recycle process
- Secure the Co and Ni sources



BACKGROUND:

- Ni and Co are costly elements in NMC cathode.
- Global supply chains have been unsecured.
- To secure domestic Co and Ni resources
- Recycle and reuse batteries
- Traditional hydrometallurgical processing is complicated.

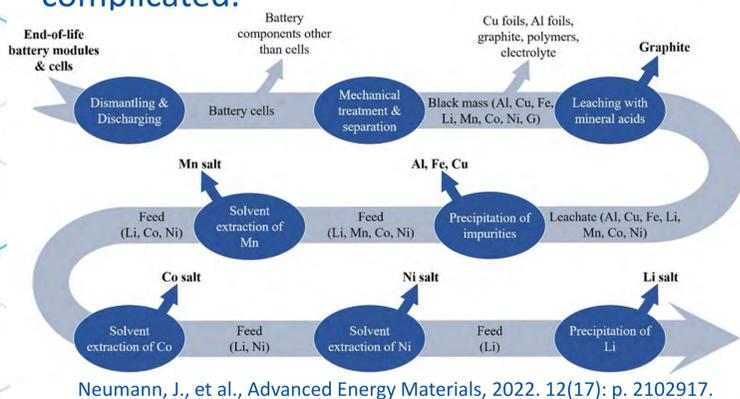

- INL developed a key technology in Ni and Co co-recovery through a fast and cheap process.
- There is no previous study on battery manufacturing using Tutton's salt $(\text{NH}_4)_2\text{Ni}_x\text{Co}_{1-x}(\text{SO}_4)_2 \cdot 6\text{H}_2\text{O}$.

Project Number: 22P1071-018FP

LRS Number: INL/PRO-22-67659


Recovery of High Purity Critical Elements from Spent Lithium-Ion Batteries (LIB) without Waste Emission

PRESENTER

Qiang Wang, Robert V. Fox

Background

In the process of close-loop recycling LIB, purified leaching solution is applied to synthesize $Ni_xMn_yCo_z(OH)_2$ precursor, generating residual solution, being rich in Na_2SO_4 and NH_4OH . Can the solution be re-used as NH_4OH resource? How Na_2SO_4 influences $Ni_xCo_yMn_z(OH)_2$ precursor co-precipitation?

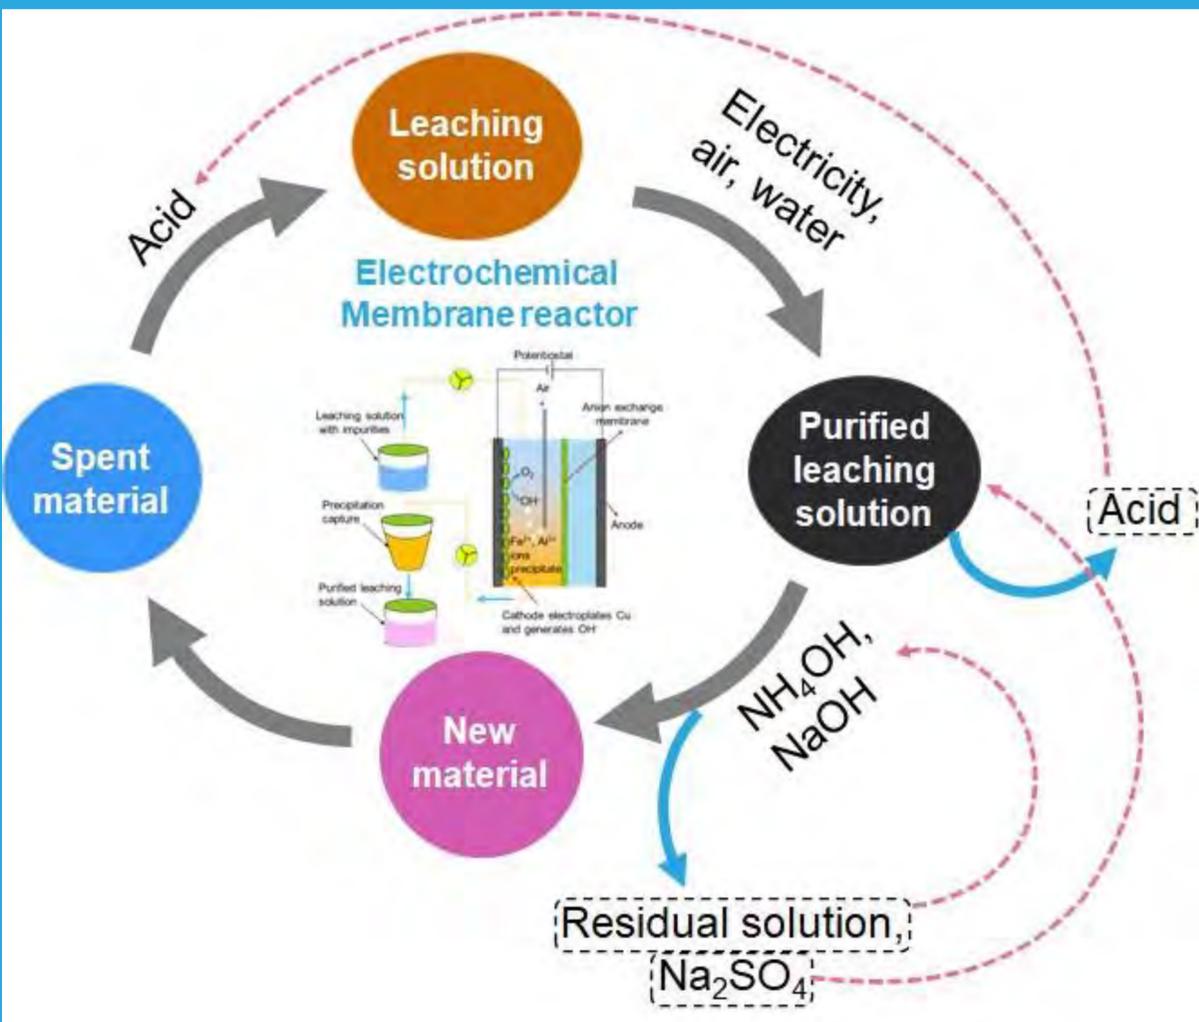


A flowsheet to achieve a high atom economy and no waste emission to close-loop recycling spent LIB


Hydro-thermal reactor for $Ni_{0.8}Mn_{0.1}Co_{0.1}(OH)_2$ precursor synthesis




$Ni_{0.8}Mn_{0.1}Co_{0.1}(OH)_2$ precursor Crystallization mechanism

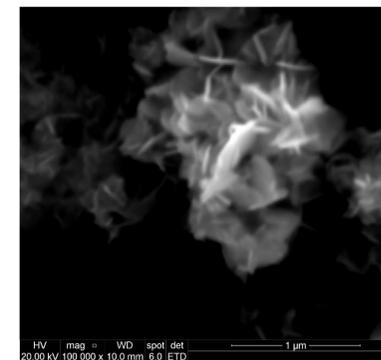


Signal crystal to cluster

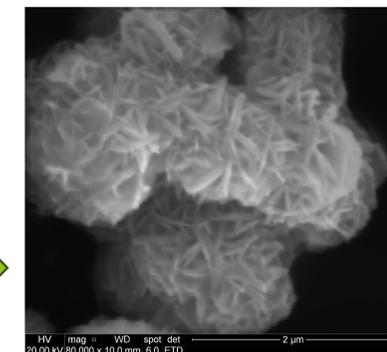


Cluster aggregation

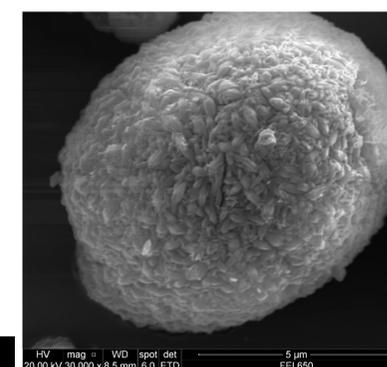


Aggregation plumping

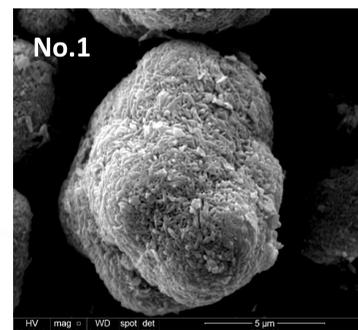


No. 1
Dense surface, aspherical secondary particle

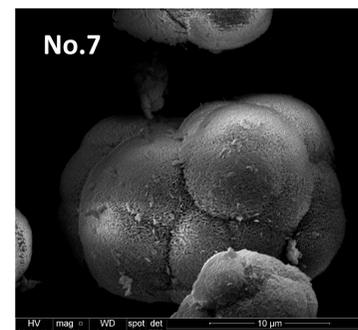

No. 7
Thin flake primary particle, aspherical secondary particle

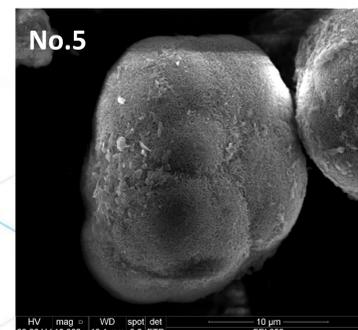

No. 5
Thin flake primary particle

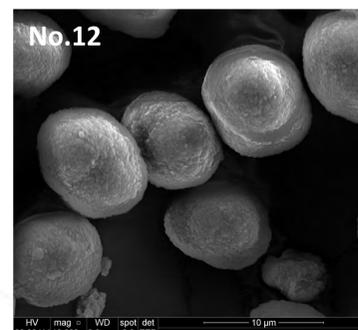

No. 12
Dense surface, spherical secondary particle

Limited Influence from Na_2SO_4 impurity on precipitation

Exp No.	Temperature	Reaction time	NH_4OH /Metal ratio	pH	Impurity	Tap Density
1	xx °C	xx hours	xx	xx	no	1.81 g·cm ⁻³
2	xx °C	xx hours	xx	xx	no	1.89 g·cm ⁻³
3	xx °C	xx hours	xx	xx	no	1.92 g·cm ⁻³
4	xx °C	xx hours	xx	xx	no	1.81 g·cm ⁻³
5	xx °C	xx hours	xx	xx	no	1.79 g·cm ⁻³
6	xx °C	xx hours	xx	xx	no	1.85 g·cm ⁻³
7	xx °C	xx hours	xx	xx	no	1.62 g·cm ⁻³
8	xx °C	xx hours	xx	xx	no	1.69 g·cm ⁻³
9	xx °C	xx hours	xx	xx	no	1.86 g·cm ⁻³
10	xx °C	xx hours	xx	xx	no	1.94 g·cm ⁻³
11	xx °C	xx hours	xx	xx	no	1.99 g·cm ⁻³
12	xx °C	xx hours	xx	xx	Na_2SO_4	1.98 g·cm ⁻³

Conclusion: Through investigating synthesis conditions systematically, an optimized condition was found to be able to synthesize $Ni_{0.8}Mn_{0.1}Co_{0.1}(OH)_2$ precursor with tap density 1.99 g·cm⁻³ > literature reported value 1.91 g·cm⁻³. Applying this synthesis condition, metal sulfate solution with high Na_2SO_4 impurity was able to synthesize high quality precursor with tap density 1.98 g·cm⁻³. The residual solution was evidenced to be able to re-use as NH_4OH resource for precursor synthesis, eliminating waste.

Project Number: 22P1071-027FP

LRS Number: RPT-23-74315

Methane Upgrading Using Dynamic Energy Supply

PRESENTER:
Debtanu Maiti



Rebecca Fushimi¹, Erin Sobchinsky^{1,2}, Debtanu Maiti¹, Yixiao Wang¹, Zongtang Fang¹, Rakesh Batchu¹
¹ Catalysis and Transient Kinetics Group, Idaho National Laboratory
² Lehigh University


Background

Vast abundance of U.S. Natural Gas (CH₄)







CH₄ → Greenhouse gas emissions

Global benzene market size
USD 22.4 Billion (2021)



Methane Dehydroaromatization (MDA) can directly convert abundant domestic methane to more valuable benzene and hydrogen. A key challenge is rapid deactivation of the Mo-ZSM5 catalyst by carbon deposition. An intensified process with periodic reaction/regeneration was investigated.

Time-on-stream (TOS) trends:

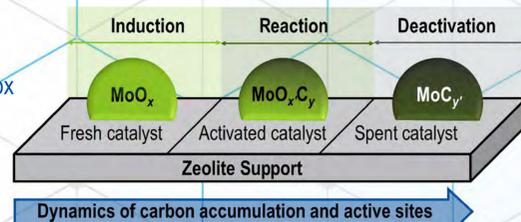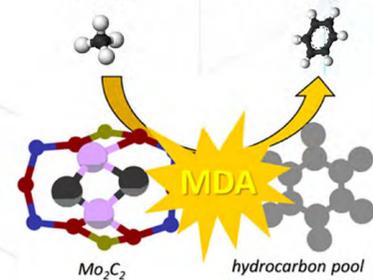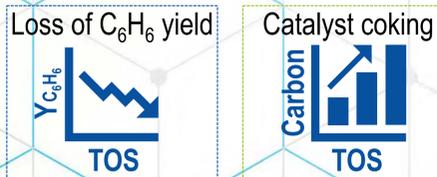

- **Goal:** high yield of C₆H₆, with high selectivity mitigate coking of active sites
- **Challenge:** dynamic nature of active sites – metal (Mo) dispersion, redox state of Mo-sites, Mo-anchoring sites, Brønsted acidity of zeolites


Methods

TAP investigation of methane dehydroaromatization

- State altering pulses to probe transient evolution of active sites
- Characterization of redox states of MoO_xC_y-clusters


Key advantages

- Nanomole size pulses (Knudsen) – state defining experiments
- In situ kinetic characterization of catalysts at reaction temperatures
- Gas-gas interactions eliminated; Insight of only gas-solid interactions

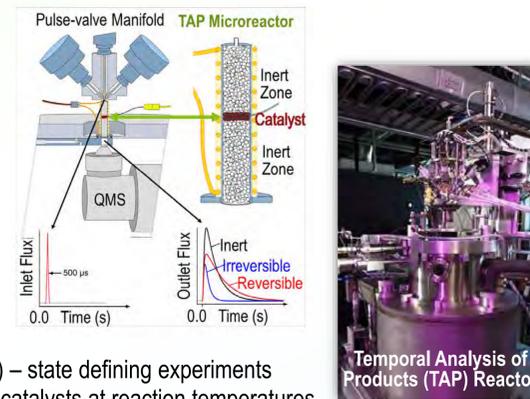

Temporal Analysis of Products (TAP) Reactor



Effect of Reduction Pretreatment

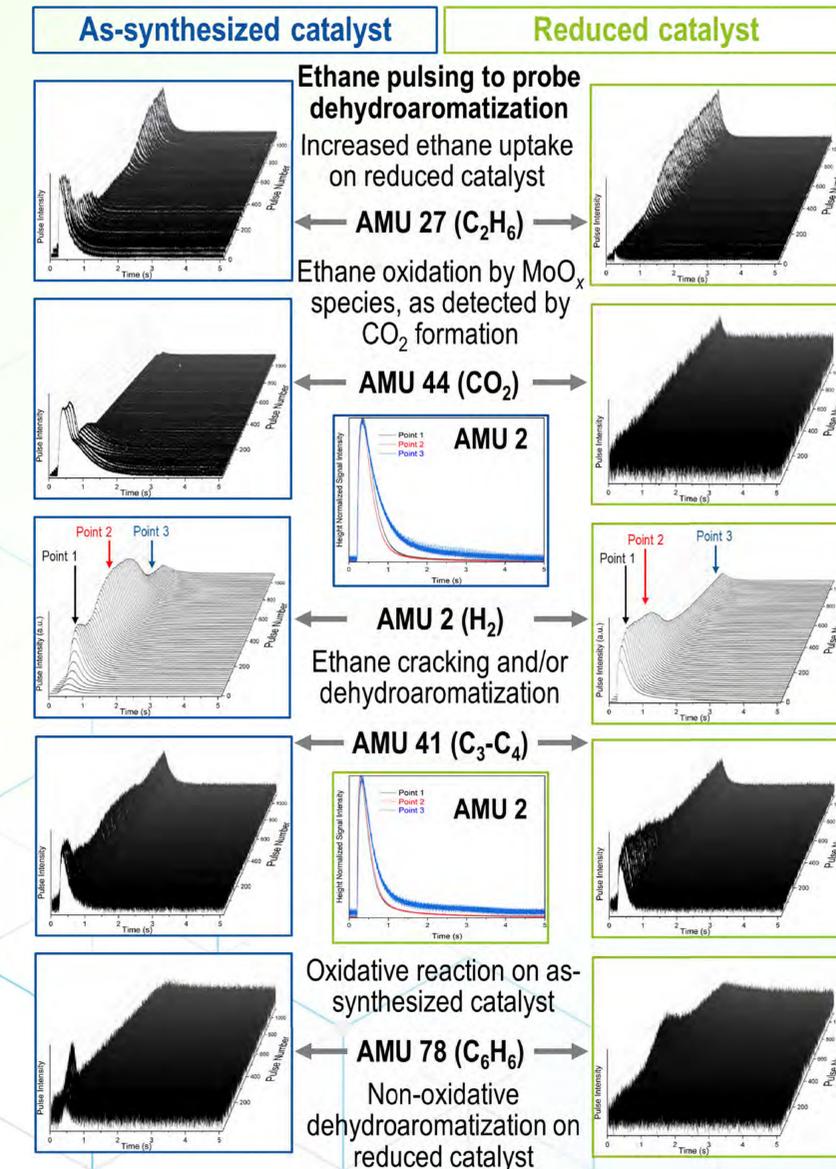


Material Characteristics

MoC_x inside zeolite pores

MoC_x outside zeolite pores

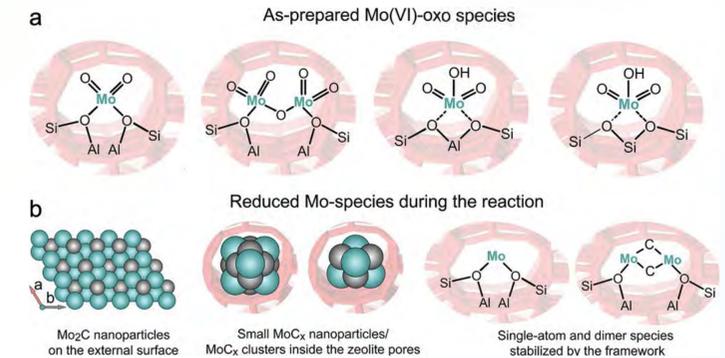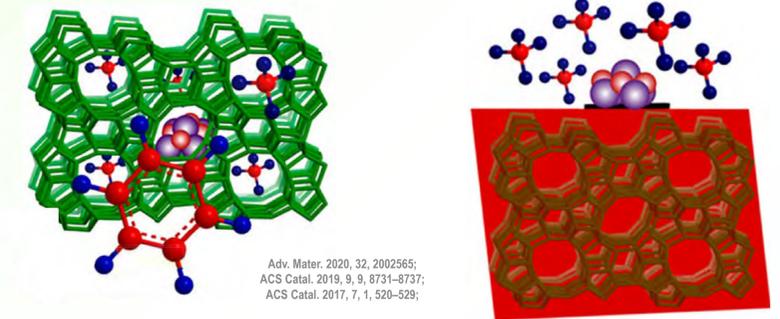

Effect of Brønsted Site Blocking

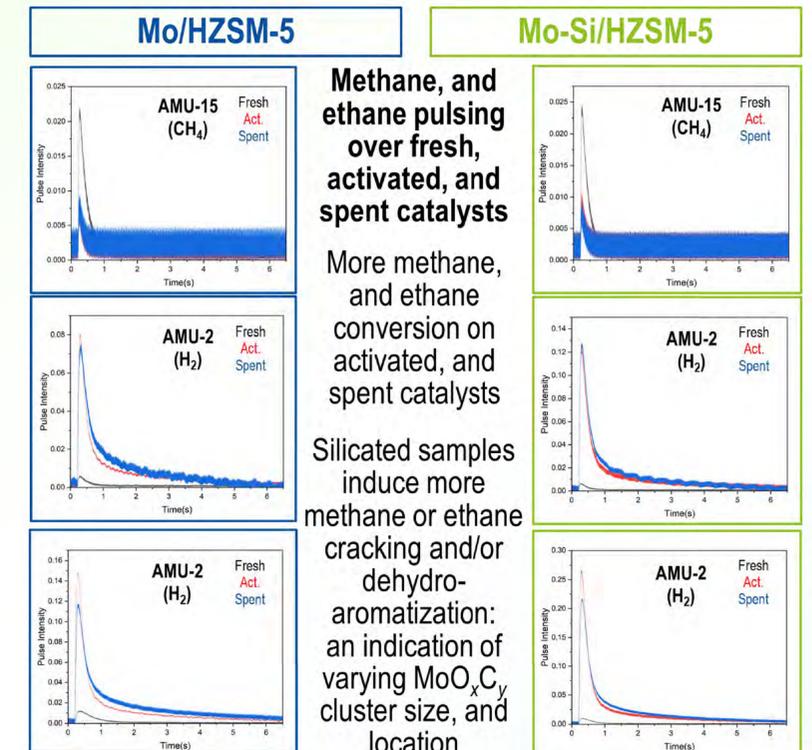

Project Number: 21A1050-062

LRS Number: INL/CON-23-73077

Continuous Syngas Production from a New Chemical Looping Concept to Balance Power Dynamics in Integrated Energy System

PRESENTER:

Debtanu Maiti




Rebecca Fushimi¹, Debtanu Maiti,¹ Zoe Benedict^{1,2}, Birendra Adhikari¹
¹ Catalysis and Transient Kinetics Group, INL ² University of Maine

Background

- CH₄ and CO₂: greenhouse gases (GHGs)
 Catalytic ↓ conversion
- Syngas (CO, H₂) → chemicals and fuels¹
- Chemical looping reforming (CLR): continuous production of syngas over a metal oxide catalyst²
- Ni/Ce1-xZrxO₂: common catalyst, good oxygen storage capacity, and good CH₄ partial oxidation³
- CH₄ crack → surface C → deactivate catalyst⁴


Objective

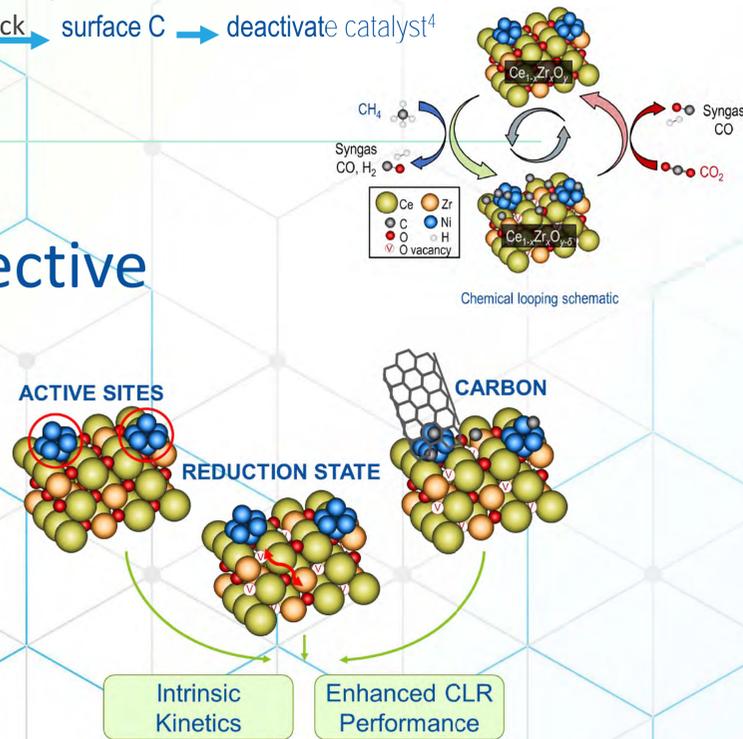

Improve reaction strategies to control C formed for best reaction kinetics with stable catalyst


Methods

- CZO wet impregnated with 5 wt.% Ni loading (5Ni/CZO)
- Catalyst performance (10 cycles) CLR in fixed-bed reactor (700 °C, 108 h⁻¹ GHSV, 10% pp in Ar)

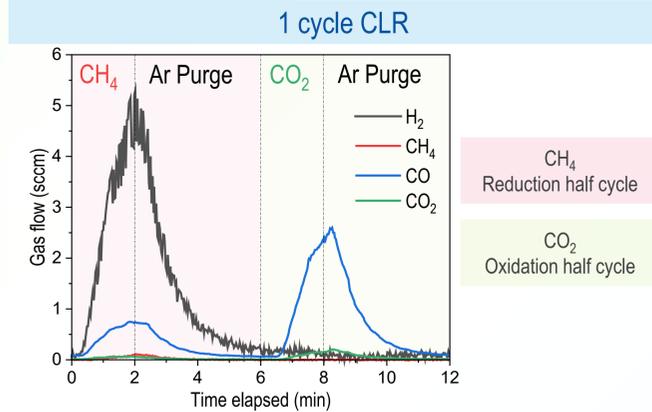


- Dynamic evolution (5 cycles CLR) probed with *in situ* Fourier transform spectroscopy
- CH₄ reduction (5, 15, 30, and 45 min)
- Bulk, surface, carbon characterization by electron microscopy, X-ray diffraction, and *ex situ* Raman

Catalyst Evolution

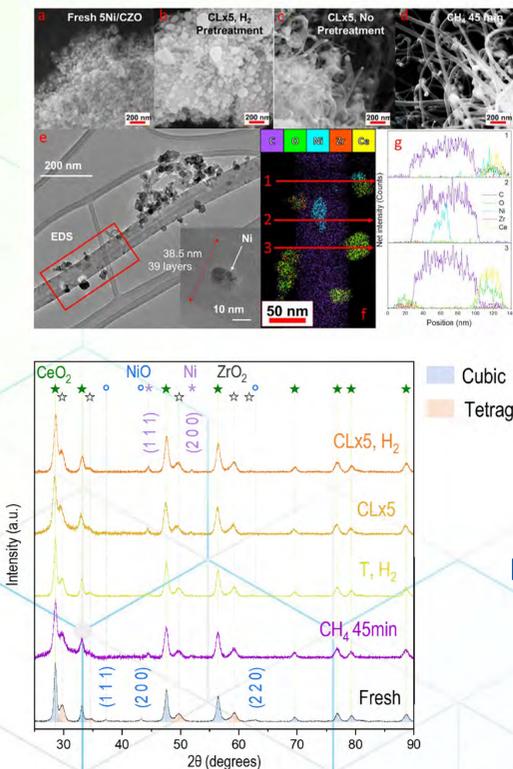


Carbon Characterization

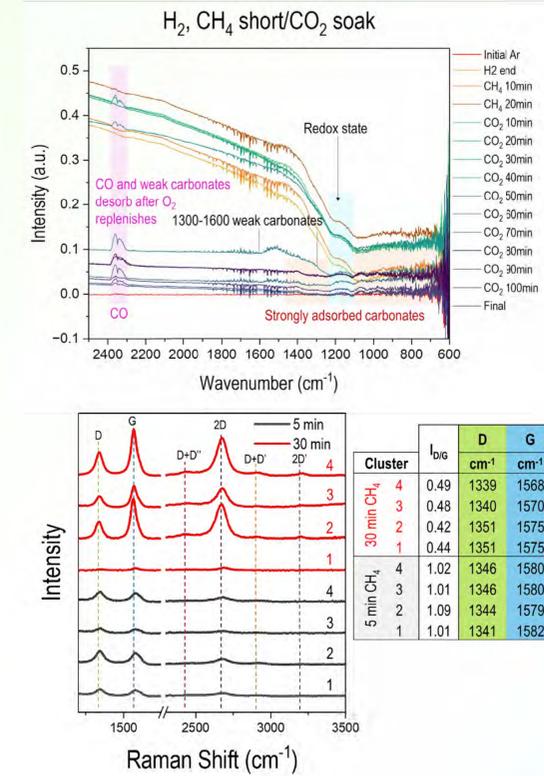

Irreversible reduction
 Easily oxidized amorphous C, hard to oxidize graphitic C

Increasingly graphitic with TOS CH₄ → Harder to oxidize

Performance

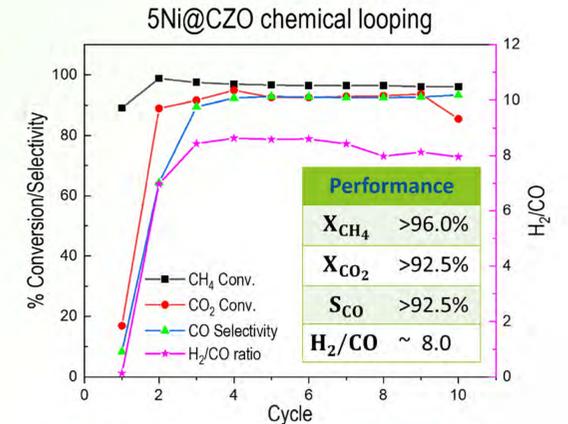

Conclusions

- Redox optimization of half cycles to establish higher yield, selectivity and catalyst stability:
 - Understanding of graphitic vs amorphous surface carbon optimization for improved continuous CLR
- Reduced Ni promotes more easily oxidized surface carbon forms
 - More stable catalyst

Project Number: 21P1064-031

LRS Number: INL/CON-23-72360

Title: Deep Reinforcement Learning for Integrated Energy Systems


Effectively balancing production with profit

PRESENTER:
Victor Walker


BACKGROUND:

Integrated Energy Systems (IES) offer increased ability, but also increased complexity and scale. Intelligent control using AI systems may be critical to success in uncertain markets. Success involves building novel frameworks and new model capabilities.


METHOD:



1. Develop DRL methodology for IES




2. Model power sub-systems for IES




Deep Reinforcement Learning can effectively learn to control an integrated energy system

Integrated Energy System models demonstrate interdependencies

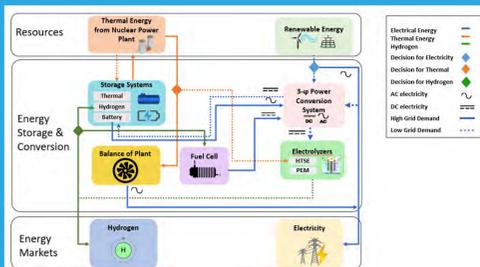

Deep Reinforcement Learning methods show improved responses to different dynamics

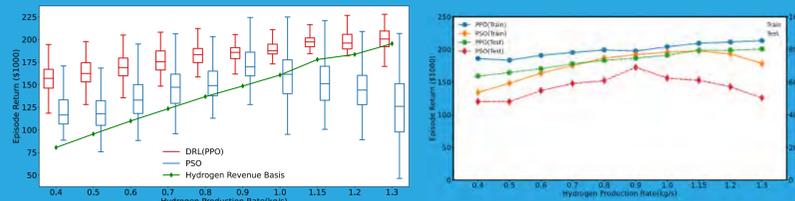


Hyperparameter tuning provides a more optimal configuration



Training Trials	BES (MWh _{eq})	HES (kg)	TES (MWh _{eq})
Trial - 1	56.2178	34403.1	7587.95
Trial - 2	71.9061	8655	2403.95
Trial - 3	34.0659	31664.1	6410.04
Trial - 4	79.5651	4266.94	929.19
Trial - 5	88.271	10479.8	2636.42
Trial - 6	42.8383	13457.4	5722.81
Trial - 7	60.2362	13035.8	6506.68
Trial - 8	39.7646	13065.5	4297.26

Best case

Full model learns improved interaction between many energy systems

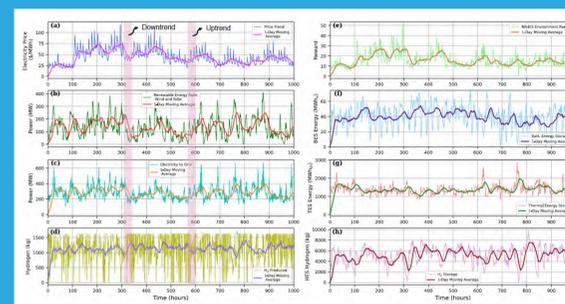


System learned to improve revenue by 25% over 120 days

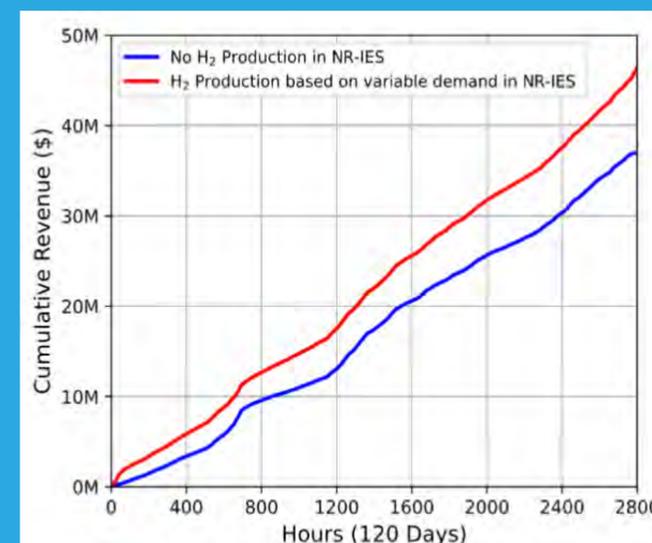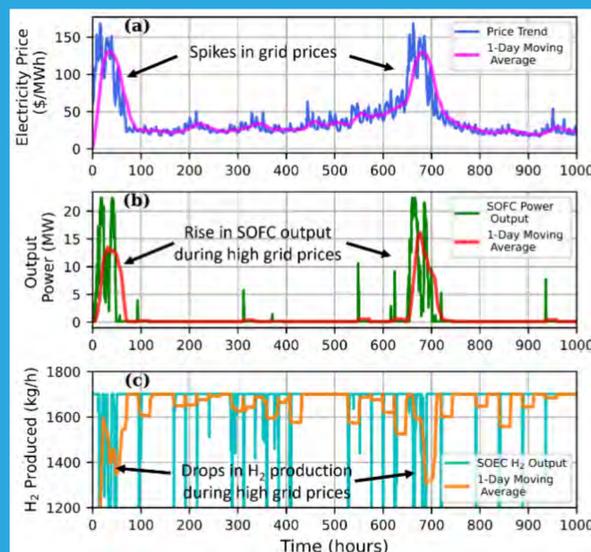


METHOD (Continued):


- Optimize sub-system configurations using DRL



- Create method for integrating models using Functional Mock-up Interfaces and Units (FMI/FMU)



- Test DRL system with a Hardware-in-Loop System

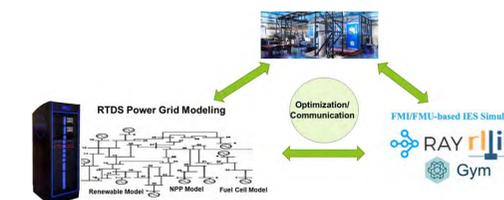

INL:
Zonggen Yi, Tyler Westover, Congjian Wang, Han Boa, Anudeep Medam, Temitayo Olowu, Victor Walker
University of Toledo:
Raghav Khanna, Ahmad Javaid, Michael Heben, Many Awesome Students

Project Number: 21A1050-073FP

LRS Number: INL/EXP-23-74354